



PICTURE

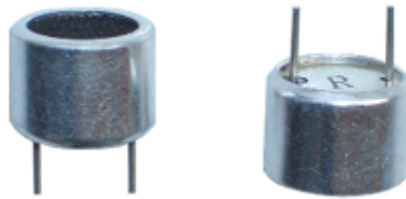


KL-A1240T/R-H10

OUTLINE DIMENSIONS (UNIT: mm)

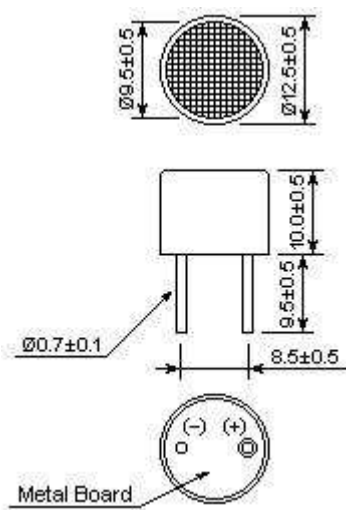

Directivity in Overall Sensitivity

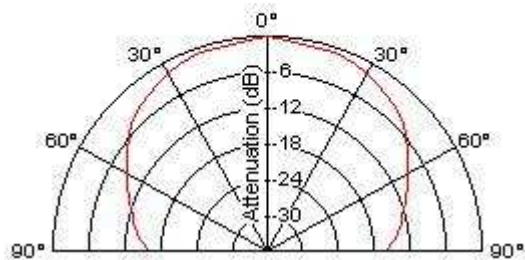

CHARACTERISTICS

Part number	KL-A1240T-H10	KL-A1240R-H10
Construction	Open structure type	Open structure type
Using Method	Transmitter	Receiver
Center Frequency	40.0±1.0KHz	40.0±1.0KHz
Sound Pressure Level	112dB min.	-----
Sensitivity	-----	-70dB min.
Capacitance	2500Pf±20%	2500Pf±20%
Maximum Input Voltage	20Vrms	20Vrms
Directivity	80°±15°(-6dB)	80°±15°(-6dB)
Operating Temperature	-20 °C~+70 °C	-20 °C~+70 °C
Storage Temperature	-40 °C~+85 °C	-40 °C~+85 °C