


## PICTURE




**KL-A1840H07-W**

## OUTLINE DIMENSIONS (UNIT: mm)

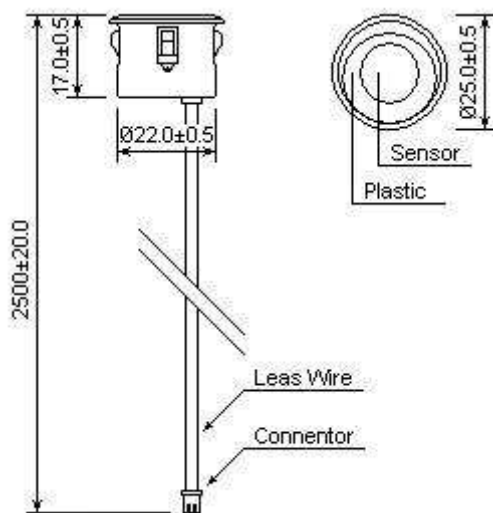

**Directivity in Overall Sensitivity**

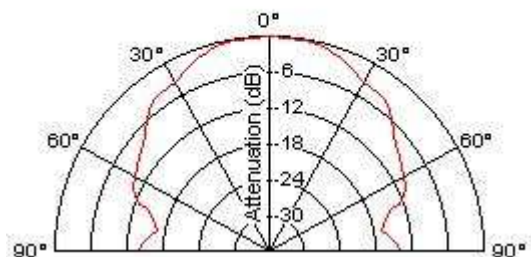

## CHARACTERISTICS

Part number	<b>KL-A1840H07-W</b>
Construction	Water proof type
Center frequency	40.0±1.0KHz
Sound pressure level	105dB min.
Sensitivity	-82dB min.
Capacitance	1800Pf±20%
Ringing	1.4ms max.
Maximum input voltage	120Vp-p
Directivity	80°±15° (-6dB)
Operating temperature	-20 °C~+60 °C
Storage Temperature	-40 °C~+80 °C